

19



Europäisches Patentamt
European Patent Office
Office européen des brevets

11

Publication number:

**0 236 768
B1**

12

EUROPEAN PATENT SPECIFICATION

45

Date of publication of the patent specification:
26.09.90

51

Int. Cl.⁸: **G01N 33/543, G01N 33/52**

21

Application number: **87101884.2**

22

Date of filing: **11.02.87**

54

Multi-layered element for quantitative analysis of immuno-reactant.

30

Priority: **20.02.86 JP 33988/86**

43

Date of publication of application:
16.09.87 Bulletin 87/38

45

Publication of the grant of the patent:
26.09.90 Bulletin 90/39

64

Designated Contracting States:
DE FR GB

56

References cited:

EP-A-0 066 648

EP-A-0 119 623

WO-A-86/02165

DE-A-3 227 474

**PATENT ABSTRACTS OF JAPAN, vol. 9,
no. 210 (P-383)[1933], 28th August 1985; &
JP-A-60 71 954 (NIHON ZENYAKU KOGYO
K.K.) 23-04-1985**

73

Proprietor: **FUJI PHOTO FILM CO., LTD., 210 Nakanuma
Minami Ashigara-shi, Kanagawa 250-01(JP)**

72

Inventor: **Sudo, Yukio, c/o Fuji Photo Film Co., Ltd.,
11-46, 3-chome, Senzui, Asaka-shi, Saitama-ken(JP)**
Inventor: **Masuda, Nobuhito, c/o Fuji Photo Film Co.,
Ltd., 11-46, 3-chome, Senzui, Asaka-shi,
Saitama-ken(JP)**
Inventor: **Miura, Kenji, c/o Fuji Photo Film Co., Ltd.,
11-46, 3-chome, Senzui, Asaka-shi, Saitama-ken(JP)**

74

Representative: **Kraus, Walter, Dr. et al, Patentanwälte
Kraus, Welsert & Partner Thomas-Wimmer-Ring 15,
D-8000 München 22(DE)**

EP 0 236 768 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION:Field of the Invention;

The present invention relates to a multi-layered element for quantitative analysis of immuno-reactants, such as antigens and antibodies.

Related Art Statement:

The antigen-antibody reaction is an immuno-reaction in which an antigen reacts with the specific antibody to be combined together, and has been widely used in the clinical examinations for detecting a trace substance in a living body and for diagnosing an autoimmune disease. However, these examinations require skilled operations, and there is a demand for a simpler method for conducting a routine examination at a good reproducibility. It is also demanded that a small quantity of a sample can be analysed within a short time preferably through an automated operation for a mass examination.

Japanese Patent Laid-Open Publication Nos. 200862/1982 (EP-A 66648A) and 77356/1984 (EP-A 101945A) disclose multi-layered elements for the simple and automatic quantitative analyses of antigens. Japanese Patent Laid-Open Publication No. 200862/1982 discloses a multi-layered element for the analysis of an antigen, which comprises a reaction layer containing the immobilized antibody for an antigen to be analysed, and a detection layer composed of a hydrophilic polymer. When a mixture of the analyte antigen and a predetermined amount of the labelled antigen is added to the reaction layer, competitive antigen-antibody reactions take place in the reaction layer so that the antigen and the labelled antigen, which have not been combined with the immobilized antibody, migrates into the detection layer. The amount of the labelled antigen migrating into the detection layer is detected optically to determine the amount of the antigen contained in the analyte.

The multi-layered analysis element disclosed by Japanese Patent Laid-Open Publication No. 77356/1984 (EP-A 0 097 952) comprises a spreading layer containing a fluorescence-labelled antigen, a developing layer made of a porous matrix of high liquid-retention capacity, and a reaction layer containing an immobilized antibody. When the analyte antigen is dropwisely added to the spreading layer, the antigen is moved to the developing layer together with the fluorescence-labelled antigen contained in the spreading layer to be retained by the developing layer. If the reaction layer does not contain the immobilized antibody, the analyte antigen and the labelled antigen can migrate only in the amount in proportion to the ratio of the liquid-retention capacity of the developing layer to that of the reaction layer. However, since the reaction layer contains the immobilized antibody, the amounts of the analyte antigen and the labelled antigen migrating into the reaction layer are increased by the amounts thereof combined with the immobilized antibody. Accordingly, as the result of competitive antigen-antibody reactions of the analyte antigen and the labelled antigen, the quantity of the analyte antigen is determined as the function of the decrease in fluorescent light intensity of the reaction layer.

The aforementioned multi-layered analysis elements are epoch-making ones since the analysis operations can be simplified and automated operation can be provided thereby. However, since the dyes or fluorescent dyes labelling to the antigen are directly detected in these known elements, the detection sensitivities thereof are limited in principle.

In order to improve the detection sensitivity, it could be conceived an application of enzymeimmunoassay. In such a method, an antigen (or antibody) is labelled by an enzyme and the activity of the enzyme labelling to the antigen (or antibody) which has been combined (or not combined) with its antibody (or antigen) through the competitive antigen-antibody reaction is detected. However, in such a method, the enzyme-labelled antigen (B) combined with antibody must be separated from the enzyme-labelled antigen (F) which has not been combined with the antibody (through a so-called B/F separation), or it is necessary to use an enzyme system having an activity for the B which is different from that for the F.

A system which does not require the B/F separation has been known by Japanese Patent Laid-Open Publication No. 2997/1980 (US-A 4,238,565), in which is utilized the phenomenon that the chemical affinity of the coenzyme with the apoenzyme is lowered by the coupling of the antibody with an antigen which has been preliminarily combined with the coenzyme. Japanese Patent Laid-Open Publication No. 209994/1983 (EP-A 94,777) teaches a method wherein depression or enhancement in enzyme activity is utilized for quantitative analysis. In this known method, an enzyme-labelled antigen is used and the enzyme-labelled antigen is coupled with an enzyme inhibitor or an enzyme activator. An enzyme and a specific antibody for the analyte antigen is carried by the same carrier to be immobilized thereby. The enzyme and the specific antibody may be carried by a relatively large particle at spatially separated sites, or may be carried by separated particles of same carrier material. As the result of competitive reactions, the enzyme inhibitor or enzyme activator combined with the immobilized enzyme inhibits or activates the immobilized enzyme, so that the enzyme activity of the entire system is depressed or en-

hanced. By measuring the depression or enhancement factor of the enzyme activity, the analyte antigen is quantitatively analysed.

However, the sensitivities of the known enzyme immunoassay methods are low in principle, since the quantity of the analyte unlabelled antigen is determined by the ratio of inhibition or activation of the enzyme activity. These methods have the disadvantages that the times for the enzymatic reactions must be prolonged for improving the sensitivities.

Accordingly, there is a demand for a multi-layered analysis element in which the enzyme immunoassay is applied and in which the B/F separation can be substantially realized for carrying out the quantitative analysis in a short time and at a high sensitivity.

OBJECT AND SUMMARY OF THE INVENTION:

Accordingly, the object of this invention is to provide a multi-layered element for the quantitative analysis of an immuno-reactant, such as an antigen or an antibody, with the use of a small quantity of the analyte immuno-reactant sample in a simple manner and a short time at a high sensitivity.

Another object of this invention is to provide such a multi-layered element for the quantitative analysis of an immuno-reactant that may be used in an automated analysis operation.

In order to achieve the aforementioned objects, the analyte immuno-reactant (antigen or antibody) is allowed to react with the corresponding immuno-reactant (antibody or antigen) in competition with the reaction between the enzyme-labelled immuno-reactant and the corresponding immuno-reactant in a reaction layer, in which the corresponding immuno-reactant (antibody or antigen) is immobilized by a carrier and an enzyme substrate is immobilized by another carrier, so that only the complex of the analyte immuno-reactant and the enzyme which has not been combined with the immobilized corresponding immuno-reactant is allowed to react with the immobilized enzyme substrate to move the reaction product of the enzymatic reaction to a reagent layer to be detected by coloring under the action of the coloring reagent.

According to one aspect of this invention, there is provided a multi-layered element for the quantitative analysis of an analyte antigen, said analyte antigen being mixed with an enzyme-labelled antigen, comprising: a water-impermeable and light-transmissible support; a reagent layer carried by said support and containing a hydrophilic polymer as a binder, and a reaction layer covering said reagent layer and made of a porous matrix; said reaction layer containing an antibody for the antigen and a substrate for the enzyme labelling to said antigen, said antibody being immobilized by a first water-insoluble carrier, said substrate being immobilized by a second water-insoluble carrier which is different from said first water-insoluble carrier for immobilizing said antibody, and whereby said reaction layer is so constructed that one part of said enzyme-labelled antigen combines with the immobilized antibody to be fixed thereby and the second remaining part of said enzyme-labelled antigen reacts with the immobilized substrate to produce an enzymatic reaction product; said reagent layer containing a detection reagent composition for coupling with said enzymatic reaction product to develop a color.

According to another aspect of this invention, there is provided a multi-layered element for the quantitative analysis of an analyte antibody, said analyte antibody being mixed with an enzyme-labelled antibody, comprising: a water-impermeable and light-transmissible support; a reagent layer carried by said support and containing a hydrophilic polymer as a binder; and a reaction layer covering said reagent layer and made of a porous matrix; said reaction layer containing an antibody for the antigen and a substrate for the enzyme labelling to said antibody, said antigen being immobilized to a first water-insoluble carrier, said substrate being immobilized on to a second water-insoluble carrier which is different from said first water-insoluble carrier for immobilizing said antigen and whereby said reaction layer is so constructed that one part of said enzyme-labelled antibody combines with the immobilized antigen to be fixed thereby and the second remaining part of said enzyme-labelled antibody reacts with the immobilized substrate to produce an enzymatic reaction product; said reagent layer containing a detection reagent composition for coupling with said enzymatic reaction product to develop a color.

In a preferred embodiment, the analyte antigen or antibody is mixed with the enzyme-labelled antigen or enzyme-labelled antibody contained in the reaction layer or the reagent layer.

DESCRIPTION OF THE DRAWING:

Fig. 1 is a sectional view showing an embodiment of the multi-layered element for the quantitative analysis according to this invention;

Fig. 2 is a sectional view showing another embodiment of the multi-layered element for the quantitative analysis according to this invention; and

Fig. 3 is a graph showing the results of analyses conducted by the use of an embodiment of the multi-layered element of this invention and a comparative multi-layered element.

DESCRIPTION OF THE INVENTION:

In the reaction layer of the multi-layered analysis element of this invention, the immobilized immuno-re-

actant molecules (antibody or antigen) are spatially separated from the immobilized enzyme substrate molecules. Therefore, when a certain enzyme-labelled immuno-reactant molecule (antigen or antibody) is coupled with the immobilized corresponding immuno-reactant molecule (antibody or antigen), the enzyme thereof cannot attack the immobilized enzyme substrate molecule and does not participate further in any enzymatic reaction. When analyte immuno-reactant molecules (which are not labelled by any enzymes) are added simultaneously, the molecules of the enzyme-labelled immuno-reactant can attack the immobilized enzyme substrate molecules through an enzymatic reaction to produce enzymatic reaction product molecules which move or penetrate into the detection layer (the reagent layer) containing a coloring reagent. The color developed by the reagent is colorimetrically determined through the light-transmissible support.

First Embodiment of the Invention:

A first embodiment of the multi-layered element for quantitative analysis, according to this invention, will now be described with reference to Fig. 1 showing the cross section thereof.

A light-transparent support is denoted by reference numeral 10, on which is overlaid a coloring reagent layer 12 made of a hydrophilic polymer. A reaction layer 14 made of a porous matrix is overlaid on the coloring reagent layer 12. The reaction layer 14 contains an antibody for the analyte antigen, the antibody being immobilized by a first water-insoluble carrier, and an enzyme substrate immobilized by a second water-insoluble carrier different from the first water-insoluble carrier for immobilizing said antibody. The coloring reagent layer 12 contains a reagent for detecting the product of the enzymatic reaction taking place in the reaction layer 14 to develop a color. The reaction layer 14 of this embodiment further contains dispersed micro particles of rutile type or anatase type titanium oxide for shielding the color.

The enzyme substrate contained in the reaction layer 14 and the detection reagent contained in the coloring reagent layer 12 may be selected in consideration of the analyte antigen and the enzyme dropped onto the multi-layered element. In detail, the combination of the enzyme, the enzyme substrate and the detection reagent is properly selected so that the quantity of the product by the enzymatic reaction is determined by the quantity of the colored dye.

Although the aforementioned embodiment has been described as it is used for the analysis of an antigen, the multi-layered element of this invention can be modified for use in the analysis of an antibody. In such a modified embodiment, the reaction layer 14 contains an antigen for the analyte antibody and the antigen contained in the reaction layer 14 is immobilized by a water-insoluble carrier.

The components for constituting respective layers of the multi-layered element of this invention will now be described in detail.

Support:

The support 10 may be made of a water-impermeable and light-transmissible (transparent) material which transmits electromagnetic radiation having a wavelength within the region between 200 nm and 900 nm. Examples of the material which may be used as the support 10 are selected from the known supports made of a film, sheet or flat plate having a smooth surface and made of a polymer material, such as polyethyleneterephthalate, polycarbonate of bisphenol-A, polystyrene, and cellulose esters including cellulose diacetate, cellulose triacetate and cellulose acetate propionate. The thickness of the support may range from 50 μ m to 1 mm, preferably from 80 μ m to 300 μ m.

The support 10 may contain micro particles of titanium dioxide, barium sulfate and/or carbon black dispersed uniformly therein to have an adjusted optical property, as desired. The surface of the support 10 may be applied with a known undercoat to ensure strong adhesion between the support 10 and the coloring reagent layer 12.

Porous Matrix:

The porous matrix constituting the reaction layer 14 may be any material which does not substantially react with the antigen, antibody and enzyme in the sample liquid dropped thereto and which can retain the carriers immobilizing the antibody (or antigen) and the enzyme substrate. The preferred materials are fibrous and non-fibrous porous sheets.

Examples of the fibrous porous sheets are woven fabrics, knitted fabrics, paper and filter paper containing an organic polymer fiber pulp, paper and filter paper containing glass fiber pulp, and non-woven cloth of fibers.

The plain weaves for the spreading layers disclosed in Japanese Patent Laid-Open Publication Nos. 164356/1980(US-A 4,292,272) and 222770/1985 (EP-A 162,301) are preferable fabric cloths, particularly preferred plain weaves being a thin cloth, calico cloth, broad cloth, poplin cloth. The woven cloths are preferably made of spun yarns (threads). The thickness of the yarns for the woven cloths ranges from 20S to 150S, preferably from about 40S to 120S, when identified by the cotton yarn count, and ranges from 45D to 300D, preferably from 45D to 130D, when identified by the silk denier. The thickness of the

woven cloth ranges from 100 μm to 500 μm , preferably from 120 μm to 350 μm . The porosity of the woven cloth ranges from 40% to 90%, preferably from 50% to 85%.

A preferred knitted cloth is a lengthwise knitted cloth disclosed in Japanese Patent Laid-Open Publication Nos. 222769/1985 (EP-A 162,302) and 222770/1985 (EP-A 162,301) as forming the spreading layer, particularly preferred lengthwise knitted cloths being tricot knitted cloth, Racshel stitch knitted cloth, Milanese stitch knitted cloth and double-tricot knitted cloth. It is preferable that the knitted cloth is composed of spun yarns (threads). The thickness of the yarns for the knitted cloths ranges from 40S to 150S, preferably from 60S to 120S, when identified by the cotton yarn count, and ranges from about 35D to 130D, preferably from 45D to 90D, when identified by the silk denier, and ranges from 20 to 50 when identified by the gauge number at the knitting step for producing the knitted cloth. The thickness of the knitted cloth ranges from 100 μm to 600 μm , preferably from 150 μm to 400 μm . The porosity of the knitted cloth ranges from 40% to 90%, preferably from 50% to 85%.

The fibrous materials which may be used for the preparation of paper, filter paper and non-woven cloths include an inorganic fibers, such as glass fibers and asbestos, natural organic fibers, such as cotton, hemp and silk, and semi-synthetic and synthetic fibers, such as copper-ammonia rayon, cellulose acetate, partially formalized polyvinylalcohol, polyethylene and polyesters including polyethylene terephthalate.

It is preferred that the fibrous material has a thickness of from 0.1 to 5 μm and a length of from 500 to 4000 μm .

Examples of preferable paper containing an organic polymer fiber pulp are paper composed solely of polyethylene fibers as disclosed, for example, by Japanese Patent Laid-Open Publication No. 148250/1982, paper made of a mixed pulp of a natural fibers with polyethylene fibers (30 to 70%) and paper made of cellulose fibers. The thickness of the paper may range from 80 to 400 μm , preferably from 100 to 250 μm ; and the porosity thereof ranges from 20% to 80%, preferably from 50% to 70%.

When the fiber base porous sheet is a woven or knitted cloth (the woven and knitted cloths being referred to generally and simply as "cloth" or "cloths" in some portions), it should be substantially deprived of the oils and fats adhering at both or either one of the yarn making step and cloth fabricating step through a dewaxing treatment, for example, by rinsing with water or a solvent. Paper and filter paper which may be used as the porous matrix in this invention should be substantially free from oils and fats. One or both of the surfaces of the fiber base porous sheet may be subjected to a physical activation treatment, preferably glow discharge processing or corona discharge processing, disclosed in Japanese Patent Laid-Open Publication No. 66359/1982 (GB-A 2,087,074); or the fiber base porous sheet may be impregnated, coated or sprayed with an aqueous solution of a surfactant preferably a nonionic surfactant, as disclosed in Japanese Patent Laid-Open Publication Nos. 164356/1980 (US-A 4 292 272), 66359/1982 (GB-A 2 087 074) and 148250/1982.

As a porous sheet made of a non-fibrous material and preferably used in this invention, it may be mentioned to a non-fibrous isotropic porous sheet, the examples being a membrane filter (blush polymer layer) made of a cellulose ester such as cellulose acetate, a polyamide such as Nylon-6 or Nylon-66, or a polycarbonate of bisphenol-A as disclosed by Japanese Patent Publication No. 21677/1978, US-A 3 992 158) and US-A 1 421 341 and US-A 3 992 158; polyolefin microporous membranes such as polyethylene microporous membrane and polypropylene microporous membrane as disclosed in the "Dai-9 Kai Plastic Film Kenkyukai Kouza Koen Yoshishu" (Collection of Summary of Report in the Ninth Plastic Film Research Meeting) (published by Kobunshi Gakkai (Japan Polymer Science Society), on February 22, 1984) and the catalogue published by the Membrane, Inc., in July of 1982; a porous sheet containing open cellular micropores composed of micro particles, such as polymer microbeads, glass microbeads or diatomaceous earth retained by a hydrophilic polymer binder as disclosed by Japanese Patent publication No. 21677/1978 and US-A 3 992 158; a porous sheet containing open cellular micropores (three-dimensional lattice structure of particles) made of polymer microbeads bound through point contact by a polymer adhesive which is not swelled by water as disclosed by Japanese Patent Laid-Open Publication No. 90859/1980 (US-A 4 258 001).

The pore size of the non-fibrous porous sheet ranges generally from 20 nm to 30 μm , preferably from 50 nm to 10 μm ; the porosity thereof ranges generally from 20% to 90%; preferably from 40% to 85%; and the thickness thereof ranges generally from 20 μm to 500 μm , preferably from 80 μm to 350 μm .

The non-fibrous porous sheet may contain light-shielding and/or light-reflecting microparticles as disclosed in Japanese Patent Publication No. 21677/1978, US-A 3 992 158 and Japanese Patent Laid-Open Publication No. 90859/1980 (US-A 4 258 001) in order to exclude optical interference in reflected light intensity measurement due to the presence of red hemoglobin in the whole blood. When a three-dimensional lattice structure of particles is used, light-shielding and/or light-reflecting microparticles may be incorporated by point contact into the three-dimensional particle structure by a binder. Examples of the light-shielding and/or light-reflecting microparticles are microparticles of titanium dioxide, microparticles of barium sulfate, carbon black, microparticles of aluminium or micro-flakes thereof.

Microparticles of titanium dioxide and microparticles of barium sulfate are preferred.

The non-fibrous porous sheet may be impregnated with a known surfactant, preferably with a nonionic surfactant, to make uniform the dispersion, permeation and passage of an aqueous liquid sample.

Carrier:

The carrier for immobilizing the antibody or the enzyme substrate may be any known material, as far as it is water-insoluble, does not influence the antigen-antibody reaction and the enzymatic reaction and has a functional group for immobilizing the antibody or the enzyme substrate or a site on which such a functional group can be introduced.

Examples of such a carrier include polysaccharides, such as agar, agarose and dextran; latices prepared by polymerization or copolymerization of an acrylamide or polymerizable ethylenic monomers; and non-fibrous microparticles, such as cellulose powder. Non-fibrous microparticle materials, such as agar and agarose, are preferred, since the volume of liquid retained thereby per unit thickness of the reaction layer is increased.

A fibrous material may be used as the carrier, and a paper sheet is prepared from the fibrous material for use as a porous sheet forming the reaction layer 14.

The carrier may be bonded or fixed to the antibody or the enzyme substrate through the known technology disclosed, for example, by Japanese Patent Laid-open Publication Nos. 7237/1978, 7238/1978 and 7239/1978 and US-A 4,168,164. The methods for bonding or fixing the carrier to the antibody or the enzyme substrate include a process including acylation by processing with carbonyl diimidazole, a process including activation with CNBr (bromocyanide) and a process including processing with a functional cross-linking agent such as glutaraldehyde.

Antibody:

The specific antibody for the analyte antigen should be used. The antibody prepared by the ordinary manner may be used, and the sensitivity of the element may be improved by the use of the monoclonal antibody.

Coloring Reagent Layer:

The coloring reagent layer 12 is a layer containing, as the binder ingredient, a hydrophilic polymer which absorbs water to be swelled thereby, and a detection reagent which detects the product of enzymatic reaction taking place in the reaction layer 14 to develop a color. This coloring reagent layer also serves as a water-absorbing layer.

The hydrophilic polymer which may be used in the reagent layer has a percentage swelling generally ranging from 150% to 2000%, preferably from about 250% to about 1500%. Specific examples of the hydrophilic polymer used in this invention include gelatins, such as a gelatine treated with an acid and a deionized gelatin, gelatine derivatives, such as a phthalated gelatin and a hydroxyacrylate graft gelatine, as disclosed by Japanese Patent Laid-Open Publication Nos. 171864/1984 (EP-A 119 861A) and 115 859/1985 (US-A 4 753 531); and agarose, pururan, pururan derivatives, polyacrylamides, polyvinyl alcohol and polyvinyl pyrrolidone as disclosed by Japanese Patent Laid-Open Publication Nos. 171 864/1984 (EP-A 0 119 861) and 115 859/1985 (US-A 4 753 531). These hydrophilic polymers may be used singly or in combination with one or more other hydrophilic polymers. In general, it is preferred that the coloring reagent layer contains gelatine or a gelatine derivative. However, when the analyte is an antibody or an antigen which is a protein, it is preferred that the reagent layer contains a hydrophilic polymer, such as polyacrylamides or polyvinyl alcohol, rather than using gelatine which is a derivative of protein.

The dry coloring reagent layer has a thickness generally ranging from about 3 μm to 50 μm , preferably from 5 μm to 30 μm , and is coated in a coating amount of from 3 g/m² to 50 g/m², preferably from 5 g/m² to 30 g/m². The coloring reagent layer may contain a known pH buffer, an organic carboxylic acid, an acidic polymer or a basic polymer to have an adjusted pH value for use (during the analytical operation). The coloring reagent layer may be further added with a known mordant or polymer mordant. Although it is preferred that the coloring reagent layer is substantially transparent, a small amount of microparticles of titanium dioxide, microparticles of barium sulfate or carbon black may be dispersed in the coloring reagent layer to control the optical property of the layer, if necessary.

A water-absorbing layer may be interposed between the coloring reagent layer 12 and the support 10. The water-absorbing layer may be mainly composed of a hydrophilic polymer similar to the coloring reagent layer. The dry water-absorbing layer has a thickness generally ranging from 1 μm to 100 μm , preferably from 3 μm to 30 μm so that the coating amount ranges generally from 1 g/m² to 100 g/m², preferably from 3 g/m² to 30 g/m². The water-absorbing layer may contain a known pH buffer, an organic carboxylic acid, an acidic polymer or a basic polymer to have an adjusted pH value at the use (during the analytical operation). The water-absorbing layer may contain a mordant, a polymer mordant, a basic polymer or an acidic polymer to serve as a detection layer.

Enzyme-Enzyme Substrate-Detection Reagent:

The enzyme substrate contained in the reaction layer 14 and the detection reagent contained in the coloring reagent layer should be selected in relation to the enzyme labelling to the analyte antigen to be

analysed by the multi-layered element of this invention. Namely, a special combination of the enzyme, enzyme substrate and detection reagent is used such that the quantity of the product of the enzymatic reaction is detected as the factor of the coloring pigment produced under the action of the used detection reagent.

Detection Reagent Example 1:

When the antigen is labelled by β -D-galactosidase and a galactose oligomer is used as the enzyme substrate, a combination of galactose oxidase, peroxidase and a coloring reagent composition may be used as the detection reagent. Galactose oxidase dehydrates D-galactose which is a product (decomposition product) of the enzymatic reaction of galactose oligomer to produce H_2O_2 as a by-product. Under the action of peroxidase, H_2O_2 reacts with the coloring reagent composition to produce a coloring matter (pigment). Although galactose also reacts with the galactose oligomer, the galactose oligomer does not hinder detection of D-galactose in the coloring reagent layer. This is because the galactose oligomer, which is present as the immobilized enzyme substrate in the reaction layer 14, is separated from the galactose oxidase in the coloring reagent layer.

β -D-galactosidase (EC 3.2.1.23) described in "Rinsho Koso Handbook" (Clinical Enzyme Handbook) edited by Baba, Wada, Kitamura and Okuda, Kodansha (1982) and T.E. Barman, "Enzyme Handbook", Springer Verlag (1969) may be used as the β -D-galactosidase for labelling the antigen. Particularly preferable β -D-galactosidase is that originated from *Diplococcus pneumoniae*.

Galactose oxidase (EC 1.1.1.48) originated from a microorganism, such as *Polyporus circinatus* or *Dactylium dendroides*, as described in "Rinsho Koso Handbook" (Clinical Enzyme Handbook) edited by Baba, Wada, Kitamura and Okuda, Kodansha (1982), "Koso Handbook" (Enzyme Handbook) edited by Maruo and Tamiya, Asakura-shoten (1982) and T. E. Barman, "Enzyme Handbook", Springer Verlag (1969) may be used as the galactose oxidase in the multi-layered element of this invention. The galactose oxidase may be used together with a coenzyme thereof or with Cu^{2+} ions, if necessary. A known pH buffer may be contained in the layer containing the galactose oxidase or the adjacent layer so that the pH value of the layer is maintained within the range of from pH 6.5 to pH 8.0, preferably from pH 6.8 to pH 7.5 during the analysing operation. The content of galactose oxidase contained in 1 m² of the multi-layered element is controlled within the range of from 1,000 U to 100,000 U, preferably from 2,000 U to 50,000 U.

Examples of the peroxidase which may be used in the multi-layered element of this invention are a peroxidase (EC 1.11.1.7) originating from a vegetable or an animal as described in "Rinsho Koso Handbook" (Clinical Enzyme Handbook) edited by Baba, Wada, Kitamura and Okuda, Kodansha (1982), "Koso Handbook" (Enzyme Handbook) edited by Maruo and Tamiya, Asakura-shoten (1982), T. E. Barman, "Enzyme Handbook", Springer Verlag (1969) and Japanese Patent Publication Nos. 45599/1981 (US-A 3 983 005) and 5520/1982 (US-A 4 211 845), and a peroxidase (EC 1.11.1.7) originating from a microorganism as described in Japanese Patent publication No. 5035/1983. It is preferred that a non-specific peroxidase originated from a vegetable or a microorganism is used. Examples of preferred peroxidase are horse radish peroxidase, radish peroxidase and peroxidase extracted from microorganisms of *Cochliobolus* and *Curvularia* genera.

A known pH buffer may be contained in the layer containing the peroxidase or the adjacent layer so that the pH value of the layer is maintained within the range of from pH 5.0 to pH 8.0, preferably from pH 6.0 to pH 7.0 during the analysing operation. The content of peroxidase contained in 1 m² of the multi-layered element is controlled within the range of from 1,000 U to 100,000 U, preferably from 2,000 U to 60,000 U.

If necessary, the peroxidase may be used together with a compound containing hexacyanoferric (II) ions or a compound which can release hexacyanoferric (II) ions as described in Japanese Patent Publication No. 25840/1980 (US 3, 886,045).

The coloring reagent composition, which may be used in this invention, forms a coloring matter (pigment) in the presence of H_2O_2 and peroxidase, the examples being those containing pigments colored by oxidation (leuco-pigments) as disclosed by Japanese Patent Publication Nos. 45599/1981 (US-A 3,983,005) and 18628/1983 (US-A 4,042,335); those forming coloring matters (pigments) by oxidation coupling as disclosed by "Annals of Clinical Chemistry", 6, pages 24 to 27 (1969), US-A 3,992,158, Japanese Patent Publication Nos. 25840/1980, 45599/1981 and 18628/1983 and Japanese Patent Laid-Open Publication No. 54962/1984 (EP-A 103,901); and pigment precursors colored or discolored by autocoupling as disclosed by Japanese Patent Publication Nos. 45599/1981 and 18628/1983.

The following are examples of the preferable coloring reagent composition:

Combination of a hydrogen donor (chromogen) and a coupler:

Hydrogen Donor: 4-Aminoantipyrine homologue and derivatives thereof, such as 4-aminoantipyrine and 4-amino-2-methyl-3-phenyl-1-(2,4,6-trichloro phenyl)-3-pyrazoline-5-one

Coupler: Derivatives of 1-hydroxynaphthalene, such as 1,7-Dihydroxynaphthalene and sodium (or potassium) 1-hydroxynaphthalene-2-sulfonate

Triarylimidazole Base Leuco-Pigment:

4,5-Bis(4-(diethylamino)phenyl)-2-(4-hydroxy-3,5-dimethoxyphenyl)imidazole
 4-(Dimethylamino) phenyl-2-(4-hydroxy-3,5-dimethoxyphenyl)-5-phenetylimidazole

Pigment Precursor:

Dianisidine and 4-methoxy-1-naphthol

10 Detection Reagent Example 2:

Another example of the detection reagent which may be used in this invention is a combination of galactose dehydrogenase, NAD and a reagent for detecting NADH.

15 Galactose hydrogenase dehydrogenates D-galactose which is a decomposition product of the immobilized enzyme substrate to reduce NAD to NADH. Accordingly, by the determination of the decrement of NAD or by the determination of formed NADH, the quantity of the product of the enzymatic reaction of the labelling enzyme can be measured.

Examples of the coloring reagent composition for colorimetric determination of NAD or NADH are coloring reagent compositions for determining the lactate dehydrogenase activity as described in Clinica Chimica Acta, 12, 210 (1965) and Japanese Patent Laid-Open Publication Nos. 44658/1984 (DE-A 3 332 144) and 88097/1984 (DE-A 3 332 144); coloring reagent compositions for determining aspartate-amino-transferase activity and coloring reagent compositions for determining alanine-amino-transferase activity as described in Clinica Chimica Acta, 28 431 (1970) and Japanese Patent Laid-Open Publication Nos. 44894/1985, 208998/1982 (DE-A 3 332 707), 44658/1984 (DE-A 3 332 144) and 88097/1984 (DE-A 3 332 144); a coloring reagent composition for determining creatine-kinase activity as described in Japanese Patent publication No. 9988/1971; coloring reagent compositions for determining creatine-phosphokinase activity as described in Japanese Patent Laid-Open Publication Nos. 11395/1974 (US-A 3 663 374), 44658/1984 (DE-A 3 332 144) and 88097/1984 (DE-A 3 332 144); coloring reagent compositions for determining testosterone activity and coloring reagent compositions for determining androsterone activity as described in US-A 3 791 933; coloring reagent compositions for determining amylase activity as described in Japanese Patent Publication No. 39637/1981 (GB-A 1 590 738); coloring reagent compositions for analysing glycerol as described in Japanese Patent Publication No. 21677/1978; and coloring reagent compositions for analysing triglyceride as described in Japanese Patent Laid-Open Publication Nos. 126494/1975 (US-A 4 142 938) and 24893/1978 (GB-A 1 590 738) and Japanese Patent Publication No. 38199/1981 (US-A 4 273 870).

Amongst the coloring reagent compositions as set forth hereinabove, it is convenient to use the coloring reagent compositions for the colorimetric determination of the quantity of free NADH in accordance with the methods as disclosed by Japanese Patent Publication Nos. 38199/1981 and 46799/1981 (US-A 4,259,440) while using tetrazonium salts in the presence of diaphorase to produce formazan pigments.

40 Known galactose dehydrogenase (EC 1.1.1.48) and NAD may be used.

Detection Reagent Example 3:

45 When the antigen is labelled by β -D-glucosidase and a glucose oligomer is used as the enzyme substrate, galactose oxidase used in the detection reagent examples 1 and 2 may be replaced by glucose oxidase to prepare a modified detection reagent composition.

In this modified composition, a known β -D-glucosidase (EC 3.2.2.21) may be used.

The most preferable glucose oligomer is an oligomer of β -D-glucose, and the next best glucose oligomer is 2-deoxy-D-glucose.

50 Examples of the glucose oxidase which may be used in this modified reagent composition are glucose oxidase (EC 1.1.3.4) originated from microorganisms, such as *Aspergillus niger*, *Penicillium notatum* and *Penicillium amagasakiense*, as described in "Rinsho Koso Handbook" (Clinical Enzyme Handbook) edited by Baba, Wada, Kitamura and Okuda, Kodansha (1982), "Koso Handbook" (Enzyme Handbook) edited by Maruo and Tamiya, Asakura-shoten (1982) and T. E. Barman, "Enzyme Handbook", Springer Verlag (1969). The glucose oxidase may be used together with a coenzyme FAD thereof and iron ions, as desired. A known pH buffer may be contained in the layer containing the glucose oxidase or the adjacent layer so that the pH value of the layer is maintained within the range of from pH 4.0 to pH 8.0, preferably from pH 5.0 to pH 6.5 during the analysing operation. The content of glucose oxidase contained in 1 m² of the multi-layered element is controlled within the range of from 1,000 U to 100,000 U, preferably from 2,000 U to 50,000 U.

Detection Reagent Example 4:

65 When the antigen is labelled by β -amylase (EC 3.2.1.2) and starch is used as the enzyme substrate, the coloring reagent composition for determining amylase activity, as described in Japanese Patent pub-

lication No. 39637/1981, may be used as the detection reagent.

When water-insoluble starch is used, the water-insoluble starch acts both as the carrier and as the immobilized enzyme substance. The present invention includes such a composition.

5 Buffer:

The multi-layered element for quantitative analysis of immuno-reactant, according to this invention, may contain a buffer selected from the known buffers for controlling the pH values of the layers at a desired value ranging within pH 6.5 to pH 8.0, preferably from pH 7.0 to 7.5 during the analysing step after the layers are applied with the liquid sample.

10 Examples of the pH buffer system which may be used in this invention are described in "Kagaku Binran, Kiso-hen" (Chemical Handbook, Fundamental Volume), edited by Chemical Society of Japan and published by Maruzen, Tokyo (1966), pages 1312 to 1320, "Data for Biochemical Research", Second Edition, edited by R. M. C. Dawson et al and published by Oxford at the Clarendon Press (1969), pages 476 to 508, "Biochemistry" 5, page 467 et seq (1966) and Analytical Biochemistry", 104, pages 300 to 310 (1980).

15 Specific examples of the buffer for controlling the pH value within the range of from pH 4.5 to pH 8.0 are buffers containing tris(hydroxymethyl)aminomethane (Tris), buffers containing phosphates, buffers containing borates, buffers containing citric acid or citrates, buffers containing glycine, malic acid, succinic acid, malonic acid, tartaric acid, glutaric acid, 3,3-dimethylglutaric acid, N,N-bis(2-hydroxyethyl)glycine (Bicine), N-2-hydroxyethylpiperazine-N-2-ethane sulfonic acid (HEPES), and combinations thereof with acids, alkalis and salts. Particularly preferred examples of the buffer are malic acid, succinic acid, tartaric acid, 3,3-dimethylglutaric acid, potassium dihydrogen phosphate-disodium hydrogen-phosphate, Tris-sodium borate, Tris-sodium borate-disodium salt of EDTA, Tris-citric acid, acetic acid-sodium acetate, citric acid-sodium dihydrogenphosphate, Bicine and HEPES.

Preparation of Multi-Layered Element of the Invention:

30 The dry multi-layered element for quantitative analysis of immuno-reactant, according to this invention, may be prepared through any of the known processes disclosed by the specifications of the preceding patents or patent applications referred to hereinbefore.

It is preferred for the convenience in preparation, package, transportation, storage and analytical operation that the multi-layered element of this invention is cut into 15 mm square to 30 mm square pieces or disks of substantially same size and each of the thus cut pieces is fixed on a slide frame disclosed, for example, by Japanese Patent publication No. 28331/1982 (US-A 4,169,751), Japanese Utility Model Laid-Open Publication No. 142454/1981 (US-A 4,387,990), Japanese Patent Laid-Open Publication No. 63452/1982, Japanese Utility Model Laid-Open Publication No. 32350/1983 and Japanese Patent Laid-Open Publication No. 501144/1983 (WO-A 83/00391) to form a slide for chemical analysis. In some cases, it may be contained in a cassette or magazine to be applied for use in the form of an elongated tape, or a small piece thereof may be applied on or contained in a card having an opening.

Method of Quantitative Analysis of an Analyte by the Use of the Multi-Layered Element of the Invention:

45 The multi-layered element for quantitative analysis of immuno-reactant, according to this invention, may be used for the quantitative analysis of an analyte (antigen or antibody) contained in an aqueous liquid sample in a manner similar to the known methods disclosed by the specifications of the preceding patents or patent applications referred to hereinbefore.

50 The same antigen as that to be analysed by the multi-layered element or an antigen having at least one common antigen determinant contained in the analyte antigen is prepared, and the thus prepared antigen is combined with an enzyme to prepare an antigen-enzyme complex. Such an antigen-enzyme complex may be produced by the prior art technology for combining the antigen with a carrier.

55 An aqueous solution of the antigen-enzyme complex is mixed with an aqueous liquid sample, such as whole blood, plasma or serum, containing the analyte antigen, and the mixed aqueous solution is spotted on the reaction layer 14 in an amount of from 5 μ m to 30 μ m, preferably from 8 to 15 μ m. The multi-layered element applied with a spot of the mixed aqueous solution is incubated at a constant temperature of from 20°C to 40°C, preferably at 37°C, whereby competitive antigen-antibody reactions take place in the reaction layer so that the immobilized enzyme substrate is decomposed by only the enzyme molecules combined with the antigen molecules which has not been combined with the antibody molecules. The product of the decomposition reaction penetrates and migrates into the coloring reagent layer 12 to react with the detection reagent to develop a color. The quantity of the antigen contained in the sample liquid can be determined by the principle of colorimetry by determining the optical density of the light reflected by the coloring matter (pigment) produced in the coloring reagent layer 12 through the light-transmissible support 14. Since color shielding microparticles are dispersed in the reaction layer 14 of this embodiment, the determination of the optical density of the reflected light is not interfered by colored particles, such

as red blood cells, which they cannot penetrate into the coloring reagent layer, even if the sample liquid is a colored liquid, such as whole blood.

Second Embodiment of the Invention:

A second embodiment of the multi-layered element for quantitative analysis of an immuno-reactant, according to this invention, is shown in Fig. 2. In the second embodiment of this invention, the reaction layer 24 includes a first reaction layer 24A containing an antibody (antigen) immobilized by a first carrier, and a second reaction layer 24B containing an enzyme substrate immobilized by a second carrier. The second reaction layer 24B is overlaid on a coloring reagent layer 22 and the first reaction layer 24A is overlaid on the second reaction layer 24B.

In the first embodiment of this invention, the immobilized antibody (antigen) and the immobilized enzyme substrate are present in a single reaction layer 14, and a substantial B/F separation is realized since the chemical affinity between the antigen and its antibody is very much greater than the chemical affinity between the enzyme and its substrate. Accordingly, in the first embodiment of this invention, a substantial B/F separation is the result of the fact that the enzyme-labelled antigen once combined with the immobilized antibody is scarcely separated from the immobilized antibody whereas the binding force between the immobilized enzyme substrate and the enzyme labelling to the antigen is not so strong as to hinder separation of the enzyme-labelled antigen.

In contrast to the first embodiment, only the antigen-enzyme complex molecules which have not been combined with the immobilized antibody molecules in the first reaction layer 24A are allowed to move into the second reaction layer 24B where they react with the immobilized enzyme substrate molecules contained in the second reaction layer 24B in this second embodiment. Accordingly, in the second embodiment of this invention, a physical B/F separation is achieved to result in more complete B/F separation as compared to the first embodiment in which the difference in chemical affinity is utilized, leading to further improvement in detection sensitivity.

The materials used for constituting the first embodiment of the multi-layered element of this invention may also be used in this second embodiment.

Third Embodiment of the Invention:

The first embodiment may be modified by the provision of a reaction layer 14 containing an antigen-enzyme complex. By the use of such a modification, the aqueous liquid sample containing the analyte antigen may be simply spotted on the reaction layer 14 to determine the quantity of the analyte antigen in a simpler manner.

Since the reaction layer 14 is maintained in a dry condition before it is spotted with the aqueous liquid sample, the enzyme in the antigen-enzyme complex does not react with the immobilized enzyme substrate in the dry reaction layer 14. When the reaction layer is divided into two separate layers, as in the case of the second embodiment where the reaction layer 24 includes the first reaction layer 24A and the second reaction layer 24B, it is preferred that the antigen-enzyme complex is contained only in the first reaction layer 24A which does not contain the immobilized enzyme substrate.

Fourth Embodiment of the Invention:

The first embodiment may be modified by the provision of a coloring reagent layer 12 containing an antigen-enzyme complex.

In this modification, an aqueous liquid sample spotted on the reaction layer 14 penetrates into the coloring reagent layer 12, and the antigen-enzyme complex migrates from the coloring reagent layer 12 to the reaction layer 14. Accordingly, the analyte antigen contacts with the immobilized antibody before the enzyme-labelled antigen contacts with immobilized antibody so that reaction of the analyte antigen with the immobilized antibody takes place preferentially as in the case where competitive antigen-antibody reactions take place.

According to the fourth embodiment, in addition to simplification of the operation for determining the quantity of the analyte, the S/N ratio is improved and the analyte can be detected at a higher sensitivity.

Fifth Embodiment:

According to a further modified embodiment of the invention, a spreading layer containing an antigen-enzyme complex may be overlaid on the reaction layer 14 or the first reaction layer 24A. By the provision of such a spreading layer, the analyte antigen need not be mixed with the enzyme-labelled antigen before the application thereof on the multi-layered element to realize simplified analytical operation similar to the third and fourth embodiments.

The spreading layer provided for this purpose may be the one which exerts a spreading function or metering function for distributing the aqueous liquid sample spotted thereon, whereby a constant volume of the liquid sample is spread in a unit area of the spreading layer to feed a constant volume of the sam-

ple liquid to a unit area of the reaction layer 14 or the first reaction layer 24A.

The same materials used as the materials for the porous matrix, including fibrous and non-fibrous porous sheet materials, may also be used as the materials for the spreading layer. Particularly preferred are woven and knitted cloths.

- 5 This fifth embodiment provided with a spreading layer has the merits that the quantity of the spotted aqueous liquid sample need not be strictly controlled and that the analysing operation can be further simplified.

- 10 Although separate reaction layer and coloring reagent layer are provided in the aforementioned embodiments, the reaction layer and the coloring reagent layer may be united into a single layer. For example, a cloth carrying an immobilized antibody (antigen) and an immobilized enzyme substrate may be impregnated with a hydrophilic polymer, such as gelatin, containing a detection reagent, or simply impregnated with a detection reagent to unify the reaction layer with the coloring reagent layer.

- 15 Although the processes and multi-layered elements for quantitative analysis of antigens have been described in the foregoing description, the present invention includes processes and multi-layered elements which are used for quantitative analysis of antibodies. When an antibody is the analyte immuno-reactant, an immobilized antigen is used in place of the immobilized antibody and a complex of an enzyme and the antibody is used in place of the antigen-enzyme complex in each of the aforementioned embodiments.

20 EXAMPLES OF THE INVENTION:

The present invention will now be described more specifically with reference to examples thereof.

EXAMPLE 1

25

(1) Preparation of T₄-MEMIDA:

- 30 T₄ (thyroxine) was analysed as the analyte antigen. In order to combine the low molecular weight T₄ with an enzyme and to prepare the antibody for T₄ at a high efficiency, prepared was N-methyl-N-carboxymethylglycyl-thyroxine methyl ester (T₄-MEMIDA) introduced with a spacer.

- 35 2g of thyroxinemethylester hydrochloride salt was dissolved in 15 ml of N,N-dimethylformamide (DMF) and then added with 500 microliters of triethylamine. While cooling the solution to -15°C, 460 µl of isobutyl chloroformate was added for reaction. After the lapse of 10 minutes, added was a solution of 0.55g of N-methylimino diacetate dissolved in 5 ml of tetrahydrofuran (THF), and the admixture was maintained at 0°C for 10 minutes and then maintained at the room temperature for additional 30 minutes for reaction, and then the reaction system was concentrated under a reduced pressure. The residue was dissolved in 50 ml of THF, added with 150 ml of ethyl acetate, and then agitated by shaking. The ethyl acetate phase was fractionated. The fractionated ethyl acetate phase was rinsed with distilled water for three times and then with a saturated aqueous solution of sodium chloride for one time, and the thus rinsed ethyl acetate phase was dried with anhydrous sodium sulfate and concentrated under a reduced pressure. The residue was dissolved in 20 ml of THF, and added with a small quantity of n-hexane to obtain a crystal. The crystal was filtered off and dried under a reduced pressure to obtain 2.3g of a specimen (Yield: 69%).

- 40 (2) Preparation of Anti-T₄ (Thyroxine) Serum:

45

- 100 mg of the T₄-MEMIDA prepared following to the procedure as described in the preceding paragraph (1) was dissolved in 2.0 ml of dry DMF, added with 15 mg of N-hydroxysuccinimide, and further added with 25 mg of 1-ethyl-3-(3-dimethylaminopropyl)carbodiimide (EDC) on an ice bath to allow to react at 4°C for one night. The reacted system was dropwisely added into 20 ml of a 0.05M carbonate buffer solution (pH 9.0) containing 100 mg of a bovine serum albumin (Fraction V, produced by Miles Laboratories Inc.) on an ice bath for reaction. The reacted system was demineralized through dialysis with the same buffer solution for 2 days (2 liters × 4 times) and with distilled water for 2 days (2 liters × 4 times), and then freeze-dried to obtain 130 mg of a solid. The thus obtained solid was analysed by infrared spectrometry. The solid was hydrolyzed with hydrochloric acid, and the hydrolyzed product was analysed by ultraviolet spectrometry. In view of the results of the infrared and ultraviolet spectrometries, it was found that about twenty T₄-MEMIDA molecules were introduced to one bovine serum albumin molecule as haptens.

- 55 A rabbit was immunized with the dry solid prepared by the foregoing process and following to the ordinary treatment, and an anti-thyroxine (anti-T₄) serum was obtained from the rabbit.

- 60 (3) Preparation T₄-β-Galactosidase Complex:

- 50 mg of the T₄-MEMIDA prepared by the process as described in paragraph (1) was dissolved in 2 ml of DMF. The solution was cooled to -15°C and added mixed with 7 µl of isobutyl chloroformate and 8 µl of triethylamine. 2.0g of a β-D-galactosidase (originating from E. Coli; produced by Sigma Chemical Co.) was dissolved in 10 ml of a 50 mM carbonate buffer solution (pH 8.5), and added dropwise to the re-

65

action product of T₄-MEMIDA on an ice bath. After reacting for 2 hours, the reaction system was demineralized through dialysis with a 20 mM sodium carbonate buffer solution (pH 8.5) at 4°C overnight, and then with distilled water for one day. The demineralized solution was applied to a chromatograph column using Sepharose® CL-4B (produced by Pharmacia Fine Chemicals Co., Ltd.) to obtain a T₄-β-galactosidase fraction. A 50 mM phosphate buffer solution (pH 7.0) was used for elution.

(4) Preparation of Agarose Carrying Immobilized Anti-T₄ Antibody

On an ice bath, 1.5 ml of anti-thyroxine (T₄) antiserum was added with 1 ml of a saturated ammonium sulfate solution to precipitate the IgG fraction. The precipitated IgG fraction was dialysed and then demineralized to obtain an anti-T₄ antibody.

Sepharose® was used as the agarose.

15g of Sepharose® 4B (produced by Pharmacia Fine Chemicals Co., Ltd.) activated by CNBr was swelled by 100 ml of water, and then rinsed with 2 liters of 0.001 M hydrochloric acid on a glass filter. The IgG fraction of the anti-T₄ antibody was dissolved in 30 ml of a 0.1 M bicarbonate buffer solution (pH 8.5; containing 0.5 M NaCl), and then added to the rinsed Sepharose® 4B activated with CNBr, and reacted at 4°C for 16 hours under agitation. After the completion of reaction, the reaction system was filtered through a glass filter, and 50 ml of a 1M ethanolamine (pH 8 to 8.5, adjusted with hydrochloric acid) was added to react again at 4°C for 2 to 5 hours. The precipitate was rinsed on a glass filter alternately with a 0.1M acetate buffer solution (pH 4.0, containing 1M NaCl) and with a 0.1M borate buffer solution (pH 8.0, containing 1M NaCl) for three times each. After rinsing, the precipitate was suspended in a 0.1M glycine buffer solution (pH 9.0, containing 0.1M NaCl and 0.1% of sodium azide) so that 200 µg of dry agarose was contained in 1 ml of the suspension.

(5) Preparation of Agarose Carrying Immobilized Galactose Oligomer

An oligomer of galactose was synthesized by the ordinary process ("Seikagaku Jikken Koza" (Biochemical Experiment Series), vol. 4, edited by Biochemical Society of Japan).

Generally according to the procedures as set forth in paragraph (4), the aforementioned oligomer was reacted with Sepharose® 4B activated by CNBr to prepare a galactose oligomer immobilized or to agarose (Sepharose®). The reaction system was diluted with distilled water so that 200 µg of dry agarose was contained in 1 ml of the suspension.

(6) Analysis of T₄:

A coloring reagent solution and a sample liquid having, respectively, the following compositions were prepared.

Coloring Reagent Solution: A 0.1M Tris-HCl buffer solution (pH 6.5) containing the following ingredients of:

Orthophenylenediamine 2 mg/ml

H₂O₂ 0.03%

Sample Liquid: A 0.1M Tris-HCl buffer solution (pH 6.5) containing the following ingredients of:

Human Serum Albumin 1 mg/ml

(produced by Sigma Chemicals Co.)

Sodium 1-Anilino-naphthalene-8-sulfonate 1 mg/ml

T₄ β-galactosidase 10 µg/ml

T₄ 0 to 2 µg/ml

A reaction liquid was prepared by mixing 2 ml of the suspension of the anti-T₄ antibody immobilized or to agarose as prepared according to paragraph (4), 2 ml of the suspension of the galactose oligomer immobilized by agarose as prepared by the paragraph (5), 0.5 ml of the coloring reagent solution and 0.5 ml of the sample liquid. A comparative reaction liquid was prepared by using an aqueous solution of galactose oligomer containing the same content of galactose oligomer in place of the suspension of the galactose oligomer immobilized by agarose.

The reaction liquid and the comparative reaction liquid were reacted at 25°C for 60 minutes while mixing by repeated inversion. The reaction was terminated by the addition of 2 ml of a M sulfuric acid solution, and the precipitating proteins, agarose and other ingredients were separated by centrifugal separation (3,000 rpm, 20 minutes). The absorbance of the supernatant at the wavelength of 490 nm was measured. The results are shown in the following Table.

Absorbance of Supernatant of the Reacted Liquids

Concentration of T ₄ in the Sample Liquid (μ g/ml)	Reaction Liquid	Comparative Reaction Liquid
0	0.35	0.68
0.04	0.38	0.69
0.12	0.42	0.70
0.36	0.48	0.70
2.0	0.52	0.72

As seen from the data set forth above, when both of the antibody and the enzyme substrate were immobilized, the enzyme activity of the antigen-enzyme complex was reduced, so that the antigen-enzyme complex (B) combined with the immobilized antibody could be microscopically detected as separated from the antigen-enzyme complex (F) which had not been combined with the antibody in the same solution even if they were not physically separated from each other.

It was also found that the analyte antigen could be detected by the difference in enzyme activity resulted from the competitive antigen-antibody reactions.

EXAMPLE 2(1) Preparation of Detection Sheet (Coloring Reagent Layer):

A reagent layer for quantitative analysis of galactose was coated on a colorless and transparent polyethyleneterephthalate (PET) film having a thickness of 185 μ m and applied with an undercoat of gelatin to form a coating having a thickness of about 15 μ m. The composition of the reagent layer will be set forth below.

<u>Component</u>	<u>Part by Weight</u>
Galactose Oxidase	2
Peroxidase	1
1,7-Dihydroxynaphthalene	5
4-Aminoantipyrine	5
Gelatin. Treated with Alkali	200
Nonion HS 210 (Surfactant produced by Nippon Oils And Fats Co., Ltd.; Polyoxyethylene Octylphenyl Ether)	2

A color shielding layer having a thickness in the dry state of 15 μm was formed on the reagent layer by coating an aqueous suspension of a mixture containing 1 part by weight of dry gelatin and 8 parts by weight of microparticles of titanium dioxide. An overcoat layer having a thickness in the dry state of 5 μm was formed on the color shielding layer by coating a gelatine solution containing 0.2% of a nonionic surfactant (HS 210) to prepare a detection sheet (coloring reagent layer).

(2) Preparation of Reaction Layer Sheet:

2g of a glass fiber filter GA-100 (produced by Toyo Filter Co., Ltd.) was cut into 3 mm square pieces which were dispersed in 400 ml of water using a homogenizer (produced by Nippon Seiki Co., Ltd.; 15,000 rpm, 10 minutes). The dispersion was filtered successively through a stainless steel mesh of 2 μm and a stainless steel mesh of 1 m/m. The glass fibers captured by the 1 μm mesh were dispersed in 500 ml of a 0.1M glycine buffer solution (pH 9.0) containing 0.5M NaCl. A predetermined volume of the dispersion was filtered through a membrane filter to separate glass fibers. The buffer solution was drained from the separated glass fibers which were then dried and weighed to know the concentration of glass fibers (mg/ml) dispersed in the buffer solution.

A calculated volume of the dispersion containing 30 mg of glass fibers was placed in a beaker to which was admixed 1 ml of the suspension of the anti-T₄ antibody immobilized or to agarose, as prepared in step (4) of Example 1, and 1 ml of the suspension of galactose oligomer immobilized by agarose, as prepared in step (5) of Example 1. The admixture was spread over a membrane filter (HAWP Filter produced by Millipore Corporation; Pore Size: 0.45 μm 47 mm ϕ) to make a sheet which was used as a reaction layer sheet (reaction layer).

A comparative reaction layer sheet was prepared by using agarose (Sephacrose® 4B) in place of agarose carrying the anti-T₄ antibody.

(3) Preparation of Multi-Layered Element:

A 12 mm diameter disk was cut from each of the detection sheet and the reaction layer sheet, prepared respectively in steps (1) and (2). The disk of the detection sheet was overlaid on the PET film surface and the disk of the reaction layer sheet was overlaid on the detection sheet. Thus, a multi-layered element was prepared.

A comparative multi-layered element was prepared using the comparative reaction layer sheet.

(4) Determination of T₄:

A sample liquid was prepared by adding the following ingredients to a 0.1M glycine buffer solution (pH 8).

Human Serum Albumin 1 mg/ml
(produced by Sigma Chemical Co.)
Sodium 1-Anilinonaphthalene-8-sulfonate 1 mg/ml
T₄- β -galactosidase Complex 50 $\mu\text{g/ml}$
T₄ 0 to 10 $\mu\text{g/ml}$

100 μl of the sample liquid was spotted on the multi-layered element prepared in step (3) and incubated at 37°C for 8 minutes. The multi-layered element was irradiated by a visible light having a center wavelength of 500 nm from the PET film side, and the optical density of the reflected light was measured.

The results of measurement are shown in Fig. 3. As shown by the curve I in the Figure, the optical density of the reflected light is changed in response to the change in concentration of T₄ when the multi-layered element of this embodiment is used, the curve I being adapted for use as a calibration curve. It should be appreciated that T₄ could be determined within a very short time without the need of B/F separation by the use of a multi-layered element prepared in accordance with this invention. It should also be appreciated that the multi-layered element of this invention has a detection sensitivity superior over the sensitivity of the conventional method, since the enzyme activity per se is utilized for the determination rather than measuring a depression rate of the enzyme activity.

The curve II (plotting the black marks) in Fig. 3 shows the results of an experiment wherein the comparative multi-layered element is used.

As should be appreciated from the foregoing that the present invention provides a multi-layered element for quantitative analysis of an analyte antigen (or antibody). The analyte antigen (or analyte antibody) is mixed with an enzyme-labelled antigen (or enzyme-labelled antibody). The element has a reaction layer in which a specific antibody (or antigen) for the analyte antigen (or analyte antibody) is carried by a first carrier to be immobilized thereby. The reaction layer further contains an enzyme substrate immobilized by a second carrier which is different from the first carrier. When the mixture of the analyte antigen and the enzyme-labelled antigen (or mixture of the analyte antibody and the enzyme-labelled antibody) penetrates into the reaction layer, competitive reactions take place so that only the part of the enzyme-labelled antigen (or enzyme-labelled antibody) which has not been combined with the immobilized antibody (or immobilized antigen) reacts with the immobilized enzyme substrate to produce an enzymatic reaction product which is detected by the detection composition contained in the reagent layer. Accordingly, the analyte antigen (or analyte antibody) can be quantitatively analysed in a simple manner within a short time using a very small quantity of liquid sample.

Claims

1. A multi-layered element for the quantitative analysis of an analyte antigen, said analyte antigen being applied on said multi-layered element while being mixed with an enzyme-labelled antigen, comprising:
 - 5 a water-impermeable and light-transmissible support;
 - a reagent layer carried by said support and containing a hydrophilic polymer as a binder; and
 - a reaction layer covering said reagent layer and made of a porous matrix, characterized in that said reaction layer contains an antibody for the antigen and a substrate for the enzyme label of said antigen, said antibody being immobilized on to a first water-insoluble carrier, said substrate being im-
 - 10 mobilized on to a second water-insoluble carrier which is different from said first water-insoluble carrier for immobilizing said antibody, and whereby said reaction layer is constructed such that one part of said enzyme-labelled antigen combines with the immobilized antibody to be fixed thereby and the second remaining part of said enzyme-labelled antigen reacts with the immobilized substrate to produce an enzymatic reaction product;
 - 15 said reaction layer contains a detection reagent composition for coupling with said enzymatic reaction product to develop a color.
2. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 1, wherein said reaction layer further contains said enzyme-labelled antigen such that said analyte antigen when said element is put into use, is mixed with said enzyme-labelled antigen therein.
- 20 3. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 1, wherein said reagent layer further contains said enzyme-labelled antigen such that said analyte antigen is mixed with said enzyme-labelled antigen therein.
4. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 1, wherein said reaction layer is covered by a spreading layer containing said enzyme-labelled antigen such that said analyte antigen when said element is put into use, is mixed with said enzyme-labelled antigen in said spreading layer.
- 25 5. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 1, 3 or 4, wherein said reaction layer comprises a first reaction layer containing said antibody immobilized or to said first water-insoluble carrier and a second reaction layer containing said enzyme substrate immobilized or to said second water-insoluble carrier, and wherein said second reaction layer covers said reagent layer and said first reaction layer covers said second reaction layer.
6. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 2, wherein said reaction layer comprises:
 - 30 a first reaction layer containing said antibody immobilized or to said first water-insoluble carrier, and said enzyme-labelled antigen; and
 - 35 a second reaction layer containing said enzyme substrate immobilized or to said second water-insoluble carrier;
 - said second reaction layer covering said reagent layer, and said first layer covering said second reaction layer.
- 40 7. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in any of claims 1 to 4, wherein said reaction layer further contains micro particles for shielding colors.
8. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in claim 5 or 6, wherein said second reaction layer further contains micro particles for shielding colors.
9. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in any of claims 1 to 8, wherein said porous matrix is a fibrous material.
- 45 10. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in any of claims 1 to 8, wherein said porous matrix is a non-fibrous material.
11. The multi-layered element for the quantitative analysis of an analyte antigen as claimed in any of claims 1 to 8, wherein said porous matrix is composed of said water-insoluble carrier.
- 50 12. A multi-layered element for the quantitative analysis of an analyte antibody, said analyte antibody being applied on said multi-layered element while being mixed with an enzyme-labelled antibody, comprising:
 - 55 a water-impermeable and light-transmissible support;
 - a reagent layer carried by said support and containing a hydrophilic polymer as a binder; and
 - a reaction layer covering said reagent layer
 - and made of a porous matrix, characterized in that
 - said reaction layer contains an antigen for the antibody and a substrate for the enzyme label of said antibody, said antigen being immobilized on to a first water-insoluble carrier, said substrate being im-
 - 60 mobilized on to a second water-insoluble carrier which is different from said first water-insoluble carrier for immobilizing said antigen, and whereby said reaction layer is constructed such that one part of said enzyme-labelled antibody combines with the immobilized antigen to be fixed thereby and the second remaining part of said enzyme-labelled antibody reacts with the immobilized substrate to produce an enzymatic reaction product;
 - said reagent layer contains a detection reagent composition for coupling with said enzymatic reaction product to develop a color.
 - 65

13. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 12, wherein said reaction layer further contains said enzyme-labelled antibody so that said analyte antibody is mixed with said enzyme-labelled antibody therein.

14. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 12, wherein said reagent layer further contains said enzyme-labelled antibody so that said analyte antibody is mixed with said enzyme-labelled antibody therein.

15. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 12, wherein said reaction layer is covered by a spreading layer containing said enzyme-labelled antibody so that said analyte antibody is mixed with said enzyme-labelled antibody in said spreading layer.

16. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 12, 14 or 15, wherein said reaction layer comprises a first reaction layer containing said antigen immobilized by said first water-insoluble carrier and a second reaction layer containing said enzyme substrate immobilized by said second water-insoluble carrier, and wherein said second reaction layer covers said reagent layer and said first reaction layer covers said second reaction layer.

17. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 13, wherein said reaction layer comprises:

a first reaction layer containing said antigen immobilized or to said first water-insoluble carrier, and said enzyme-labelled antibody; and

a second reaction layer containing said enzyme substrate immobilized or to said second water-insoluble carrier;

said second reaction layer covering said reagent layer, and said first layer covering said second reaction layer.

18. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in any of claims 12 to 15, wherein said reaction layer further contains micro particles for shielding colors.

19. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in claim 16 or 17, wherein said second reaction layer further contains micro particles for shielding colors.

20. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in any of claims 12 to 19, wherein said porous matrix is a fibrous material.

21. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in any of claims 12 to 19, wherein said porous matrix is a non-fibrous material.

22. The multi-layered element for the quantitative analysis of an analyte antibody as claimed in any of claims 12 to 19, wherein said porous matrix is composed of said water-insoluble carrier.

Patentansprüche

1. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens, wobei das Analyten-Antigen auf das mehrschichtige Element unter Vermischen mit einem Enzym-markierten Antigen aufgebracht wird, mit:

einem wasserundurchlässigen und lichtdurchlässigen Träger;
einer Reagensschicht, die durch den Träger getragen wird und ein hydrophiles Polymeres als Binder enthält; und

einer Reaktionsschicht, die die Reagensschicht bedeckt und aus einer porösen Matrix besteht, dadurch gekennzeichnet, daß die Reaktionsschicht einen Antikörper für das Antigen und ein Substrat für den Enzym-Marker des Antigens enthält, wobei der Antikörper auf einem ersten wasserunlöslichen Träger immobilisiert ist, das Substrat auf einem zweiten wasserunlöslichen Träger, der sich von dem ersten wasserunlöslichen Träger unterscheidet, zur Immobilisation des Antikörpers immobilisiert ist und wobei die Reaktionsschicht so konstruiert ist, daß ein Teil des Enzym-markierten Antigens sich mit dem immobilisierten Antikörper verbindet, um dabei fixiert zu werden, und daß der zweite verbleibende Teil des Enzym-markierten Antigens mit dem immobilisierten Substrat reagiert, um ein enzymatisches Reaktionsprodukt zu ergeben, und daß die Reaktionsschicht eine Nachweis-Reagenszusammensetzung zur Kopplung mit dem enzymatischen Reaktionsprodukt enthält, um einen Farbstoff zu entwickeln.

2. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 1, dadurch gekennzeichnet, daß die Reaktionsschicht weiterhin das Enzym-markierte Antigen, so daß das Analyten-Antigen bei Verwendung des Elements mit dem Enzym-markierten Antigen darin vermischt wird, enthält.

3. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 1, dadurch gekennzeichnet, daß die Reagensschicht weiterhin das Enzym-markierte Antigen, so daß das Analyten-Antigen bei Verwendung des Elements mit dem Enzym-markierten Antigen darin vermischt wird, enthält.

4. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 1, dadurch gekennzeichnet, daß die Reaktionsschicht von einer Ausbreitungsschicht bedeckt ist, die das Enzym-markierte Antigen, so daß das Analyten-Antigen bei Verwendung des Elements mit dem Enzym-markierten Antigen in der Ausbreitungsschicht vermischt wird, enthält.

5. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 1, 3 oder 4, dadurch gekennzeichnet, daß die Reaktionsschicht eine erste Reaktionsschicht, die den auf dem ersten wasserunlöslichen Träger immobilisierten Antikörper enthält, und eine zweite Reaktionsschicht, die das auf dem zweiten wasserunlöslichen Träger immobilisierte Enzym-Substrat enthält, umfaßt und wobei die zweite Reaktionsschicht die Reagensschicht bedeckt und die erste Schicht die zweite Reaktionsschicht bedeckt.
6. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 2, dadurch gekennzeichnet, daß die Reaktionsschicht eine erste Reaktionsschicht, die den auf dem ersten wasserunlöslichen Träger immobilisierten Antikörper und das Enzym-markierte Antigen enthält; und eine zweite Reaktionsschicht, die das auf dem zweiten wasserunlöslichen Träger immobilisierte Enzym-Substrat enthält, umfaßt, wobei die zweite Reaktionsschicht die Reagensschicht bedeckt und die erste Schicht die zweite Reaktionsschicht bedeckt.
7. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß die Reaktionsschicht weiterhin Mikroteilchen zum Abschirmen der Farbstoffe enthält.
8. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach Anspruch 5 oder 6, dadurch gekennzeichnet, daß die Reaktionsschicht weiterhin Mikroteilchen zur Abschirmung der Farbstoffe enthält.
9. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die poröse Matrix ein faserartiges Material ist.
10. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die poröse Matrix ein nicht-faserartiges Material ist.
11. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antigens nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die poröse Matrix aus dem wasserunlöslichen Träger zusammengesetzt ist.
12. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers, wobei der Analyten-Antikörper auf das mehrschichtige Element unter Vermischen mit einem Enzym-markierten Antikörper aufgebracht wird, mit einem wasserundurchlässigen und lichtdurchlässigen Träger; einer Reagensschicht, die durch den Träger getragen wird und die ein hydrophiles Polymeres als Binder enthält; und einer Reaktionsschicht, die die Reagensschicht bedeckt und aus porösem Material besteht, dadurch gekennzeichnet, daß die Reaktionsschicht ein Antigen für den Antikörper und ein Substrat für den Enzym-Marker des Antikörpers enthält, wobei das Antigen auf einem ersten wasserunlöslichen Träger immobilisiert ist, das Substrat auf einem zweiten wasserunlöslichen Träger, der sich von dem ersten wasserunlöslichen Träger unterscheidet, zur Immobilisation des Antigens immobilisiert ist und wobei die Reaktionsschicht so konstruiert ist, daß ein Teil des Enzym-markierten Antikörpers sich mit dem immobilisierten Antigen verbindet, um dabei fixiert zu werden, und daß der zweite verbleibende Teil des Enzym-markierten Antikörpers mit dem immobilisierten Substrat reagiert, um ein enzymatisches Reaktionsprodukt zu bilden, und daß die Reagensschicht eine Detektions-Reagenszusammensetzung zur Kopplung mit dem enzymatischen Reaktionsprodukt enthält, um einen Farbstoff zu bilden.
13. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 12, dadurch gekennzeichnet, daß die Reaktionsschicht weiterhin den Enzym-markierten Antikörper, so daß der Analyten-Antikörper bei Verwendung des Elements mit dem Enzym-markierten Antikörper darin vermischt wird, enthält.
14. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 12, dadurch gekennzeichnet, daß die Reagensschicht weiterhin den Enzym-markierten Antikörper, so daß der Analyten-Antikörper bei Verwendung des Elements mit dem Enzym-markierten Antikörper darin vermischt wird, enthält.
15. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 12, dadurch gekennzeichnet, daß die Reaktionsschicht von einer Ausbreitungsschicht, die den Enzym-markierten Antikörper enthält, so daß der Analyten-Antikörper bei Verwendung des Elements mit dem Enzym-markierten Antikörper in der Ausbreitungsschicht vermischt wird, bedeckt ist.
16. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 12, 14 oder 15, dadurch gekennzeichnet, daß die Reaktionsschicht eine erste Reaktionsschicht, die das auf dem ersten wasserunlöslichen Träger immobilisierte Antigen enthält, und eine zweite Reaktionsschicht, die das auf dem zweiten wasserunlöslichen Träger immobilisierte Enzym-Substrat enthält, umfaßt und wobei die zweite Reaktionsschicht die Reagensschicht bedeckt und die erste Reaktionsschicht die zweite Reaktionsschicht bedeckt.
17. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 13, dadurch gekennzeichnet, daß die Reaktionsschicht eine erste Reaktionsschicht, die das auf dem ersten wasserunlöslichen Träger immobilisierte Antigen und den Enzym-markierten Antikörper enthält; und eine zweite Reaktionsschicht, die das auf dem zweiten wasserunlöslichen Träger immobilisierte Enzym-Substrat enthält, umfaßt; wobei die zweite Reaktionsschicht die Reagensschicht bedeckt und die erste Schicht die zweite Reaktionsschicht bedeckt.
18. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach einem der

Ansprüche 12 bis 15, dadurch gekennzeichnet, daß die Reaktionsschicht weiterhin Mikroteilchen zur Abschirmung der Farbstoffe enthält.

19. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach Anspruch 16 oder 17, dadurch gekennzeichnet, daß die zweite Reaktionsschicht weiterhin Mikroteilchen zur Abschirmung der Farbstoffe enthält.

20. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach einem der Ansprüche 12 bis 19, dadurch gekennzeichnet, daß die poröse Matrix ein faserartiges Material ist.

21. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach einem der Ansprüche 12 bis 19, dadurch gekennzeichnet, daß die poröse Matrix ein nicht-faserartiges Material ist.

22. Mehrschichtiges Element zur quantitativen Analyse eines Analyten-Antikörpers nach einem der Ansprüche 12 bis 19, dadurch gekennzeichnet, daß die poröse Matrix sich aus dem wasserunlöslichen Träger zusammensetzt.

Revendications

1. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser, ledit antigène à analyser étant appliqué sur ledit élément à couches multiples alors qu'il est mélangé avec un antigène marqué par une enzyme, comprenant:

un support imperméable à l'eau et transparent; une couche de réactif portée par ledit support et contenant un polymère hydrophile comme liant; et une couche de réaction recouvrant ladite couche de réactif et faite d'une matrice poreuse, caractérisé en ce que ladite couche de réaction contient un anticorps pour l'antigène et un substrat pour l'enzyme de marquage dudit antigène, ledit anticorps étant immobilisé sur un premier porteur insoluble dans l'eau, ledit substrat étant immobilisé sur un second porteur insoluble dans l'eau qui est différent dudit premier porteur insoluble dans l'eau immobiliser ledit anticorps, ladite couche de réaction étant construite de telle sorte qu'une partie dudit antigène marqué par une enzyme se combine avec l'anticorps immobilisé pour être ainsi fixée et la seconde partie restante dudit antigène marqué par une enzyme réagit avec le substrat immobilisé pour former un produit de réaction enzymatique; ladite couche de réaction contient une composition réactive de détection pour le couplage avec ledit produit de réaction enzymatique pour produire une couleur.

2. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon la revendication 1, dans lequel ladite couche de réaction contient de plus ledit antigène marqué par une enzyme, si bien que ledit antigène à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit antigène marqué par une enzyme.

3. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon la revendication 1, dans lequel ladite couche de réactif contient de plus ledit antigène marqué par une enzyme, si bien que ledit antigène à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit antigène marqué par une enzyme.

4. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon la revendication 1, dans lequel ladite couche de réaction est recouverte par une couche d'étalement contenant ledit antigène marqué par une enzyme, si bien que ledit antigène à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit antigène marqué par une enzyme dans ladite couche d'étalement.

5. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon la revendication 1, 3 ou 4, dans lequel ladite couche de réaction comprend une première couche de réaction contenant ledit anticorps immobilisé sur ledit premier porteur insoluble dans l'eau et une seconde couche de réaction contenant ledit substrat enzymatique immobilisé sur ledit second porteur insoluble dans l'eau et dans lequel ladite seconde couche de réaction recouvre ladite couche de réactif, et ladite première couche de réaction recouvre ladite seconde couche de réaction.

6. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon la revendication 2, dans lequel ladite couche de réaction comprend:

une première couche de réaction contenant ledit anticorps immobilisé sur ledit premier porteur insoluble dans l'eau et ledit antigène marqué par une enzyme; et

une seconde couche de réaction contenant ledit substrat enzymatique immobilisé sur ledit second porteur insoluble dans l'eau; ladite seconde couche de réaction recouvrant ladite couche de réactif et ladite première couche recouvrant ladite seconde couche de réaction.

7. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon l'une quelconque des revendications 1 à 4, dans lequel ladite couche de réaction contient de plus des microparticules pour masquer des couleurs.

8. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon les revendications 5 ou 6, dans lequel ladite seconde couche de réaction contient de plus des microparticules pour masquer des couleurs.

9. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon l'une quelconque des revendications 1 à 8, dans lequel ladite matrice poreuse est une matière fibreuse.

10. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon l'une quelconque des revendications 1 à 8, dans lequel ladite matrice poreuse est une matière non fibreuse.

11. Élément à couches multiples pour l'analyse quantitative d'un antigène à analyser selon l'une quel-

conque des revendications 1 à 8, dans lequel ladite matrice poreuse est composée dudit porteur insoluble dans l'eau.

12. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser, ledit anticorps à analyser étant appliqué sur ledit élément à couches multiples alors qu'il est mélangé avec un anticorps marqué par une enzyme, comprenant:

un support imperméable à l'eau et transparent; une couche de réactif portée par ledit support et contenant un polymère hydrophile comme liant; et

une couche de réaction recouvrant ladite couche de réactif et faite d'une matrice poreuse, caractérisé en ce

que ladite couche de réaction contient un antigène pour l'anticorps et un substrat pour l'enzyme de marquage dudit anticorps, ledit antigène étant immobilisé sur un premier porteur insoluble dans l'eau, ledit substrat étant immobilisé sur un second porteur insoluble dans l'eau qui est différent dudit premier porteur insoluble dans l'eau pour immobiliser ledit antigène, ladite couche de réaction étant construite de telle sorte qu'une partie dudit anticorps marqué par une enzyme se combine avec l'antigène immobilisé pour être ainsi fixée et la seconde partie restante dudit anticorps marqué par une enzyme réagit avec le substrat immobilisé pour former un produit de réaction enzymatique;

ladite couche de réaction contient une composition réactive de détection pour le couplage avec ledit produit de réaction enzymatique pour produire une couleur.

13. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon la revendication 12, dans lequel ladite couche de réaction contient de plus ledit anticorps marqué par une enzyme, si bien que ledit anticorps à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit anticorps marqué par une enzyme.

14. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon la revendication 12, dans lequel ladite couche de réactif contient de plus ledit anticorps marqué par une enzyme, si bien que ledit anticorps à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit anticorps marqué par une enzyme.

15. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon la revendication 12, dans lequel ladite couche de réaction est recouverte par une couche d'étalement contenant ledit anticorps marqué par une enzyme, si bien que ledit anticorps à analyser, lorsque ledit élément est utilisé, est mélangé avec ledit anticorps marqué par une enzyme dans ladite couche d'étalement.

16. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon la revendication 12, 14 ou 15, dans lequel ladite couche de réaction comprend une première couche de réaction contenant ledit antigène immobilisé sur ledit premier porteur insoluble dans l'eau et une seconde couche de réaction contenant ledit substrat enzymatique immobilisé sur ledit second porteur insoluble dans l'eau et dans lequel ladite seconde couche de réaction recouvre ladite couche de réactif, et ladite première couche de réaction recouvre ladite seconde couche de réaction.

17. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon la revendication 13, dans lequel ladite couche de réaction comprend:

une première couche de réaction contenant ledit antigène immobilisé sur ledit premier porteur insoluble dans l'eau et ledit anticorps marqué par une enzyme; et

une seconde couche de réaction contenant ledit substrat enzymatique immobilisé sur ledit second porteur insoluble dans l'eau;

ladite seconde couche de réaction recouvrant ladite couche de réactif et ladite première couche recouvrant ladite seconde couche de réaction.

18. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon l'une quelconque des revendications 12 à 15, dans lequel ladite couche de réaction contient de plus des microparticules pour masquer des couleurs.

19. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon les revendications 16 ou 17, dans lequel ladite seconde couche de réaction contient de plus des microparticules pour masquer des couleurs.

20. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon l'une quelconque des revendications 12 à 19, dans lequel ladite matrice poreuse est une matière fibreuse.

21. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon l'une quelconque des revendications 12 à 19, dans lequel ladite matrice poreuse est une matière non fibreuse.

22. Élément à couches multiples pour l'analyse quantitative d'un anticorps à analyser selon l'une quelconque des revendications 12 à 19, dans lequel ladite matrice poreuse est composée dudit porteur insoluble dans l'eau.

FIG. 1

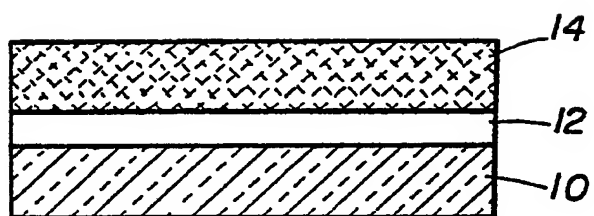


FIG. 2

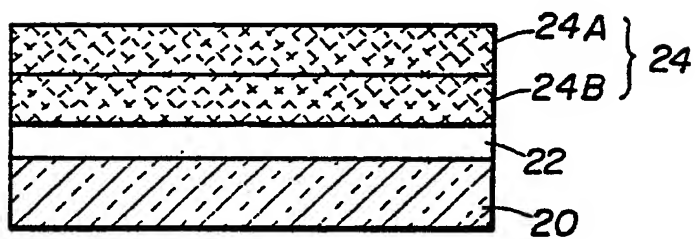


FIG. 3